



Q-175A For lead sealing

Technical data


Crimping range:	φ10mm
Length:	175mm
Weight:	approx.0.43kg
Material:	stainless steel
Package:	white paper box



Q-200A For lead sealing

Technical data

Crimping range:	φ11mm
Length:	200mm
Weight:	approx.0.46kg
Material:	stainless steel
Package:	white paper box

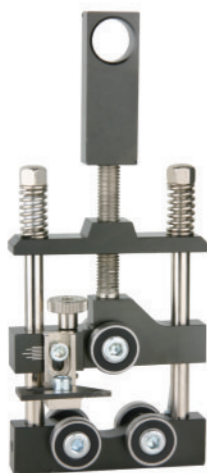

SK-40 For non-insulated terminal

Technical data

Peeling range	φ20-φ40mm
Weight:	0.8kg
Length:	250mm
Note:	for peeling the end of cable insulation and semiconductor



SK-30

Technical data

Peeling range	φ15-φ30mm
Weight:	0.8kg
Length:	325mm
Note:	for peeling the end of cable insulation and semiconductor



Adjustable peeling thickness, use for conductor, cable terminal and mid peeling

BXQ-Z-40B

Technical data

Peeling range:	14-40mm
Peeling thickness:	below 6mm but for 4mm middle terminal
Size:	275x95x60mm
Weight:	0.9kgs



C-18L
3/8"NPT



C-18S
1/4"NPT



C-19M
3/8"BS