

HZ-1632

HAND-OPERATED HYDRAULIC PRESS TOOL

- With interchangeable dies
- 350° rotating head
- Two stage hydraulic system with fast feed and power stroke
- Light weight due to high quality aluminum housing
- Automatic retraction when crimping is completed
- With safety valve to prevent pressure overload.


Technical data	
Press range:	Ø16-32mm
Rated press force:	60kN
Rated work pressure:	63Mpa
Stroke:	17mm
Length:	460mm
Weight:	3.3kgs
Package:	Metal box

HZ-1550

HAND-OPERATED HYDRAULIC PRESS TOOL

- Forged jaws with high strength, sturdy and durable
- 350° rotating head
- Two stage hydraulic system with fast feed and power stroke
- Light weight due to high quality aluminum housing
- Automatic retraction when crimping is completed
- With safety valve to prevent pressure overload.

Technical data	
Press range:	12-54mm[1/2"-2"] for stainless steel pipe 12-108mm[1/2"-4"] for PEX,Multi-layer and copper pipe
Rated press force:	32kN
Rated work pressure:	33Mpa
Stroke:	40mm
Package:	Metal box

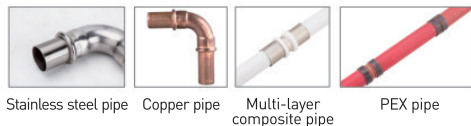

FHT-60100

HYDRAULIC PRESS HEAD

For big size from 60-108mm stainless steel pipe

Technical data	
Press range:	60-108mm[2-4"]for stainless steel pipe and copper pipe
Rated work pressure:	700bar(70MPa)
Stroke:	80mm
Oil capacity:	80ml
Tool size:	515x280x84mm
Weight:	9.3kgs(without jaw)
Package:	Metal box

FHT-1550

HYDRAULIC PRESS HEAD

- Forged jaws with high strength, sturdy and durable
- Hand pump, foot pump and electrical pump optional

Technical data	
Press range:	12-54mm[1/2"-2"] for stainless steel pipe 12-108mm[1/2"-4"] for PEX,Multi-layer and copper pipe
Rated press force:	32kN
Rated work pressure:	52Mpa
Stroke:	40mm
Package:	Metal box