




HT-1930

Hand-operated Hydraulic Press Tool

- 350° rotating head
- Two stage hydraulic system with fast feed and power stroke
- Light weight due to high quality aluminum housing
- Automatic retraction when crimping is completed
- With safety valve to prevent pressure overload.

Technical data

Press range:	12-35mm Stainless steel pipe 12-35mm(1/2"-1 3/8") Copper pipe 16-40mm PEX&Multi-layer composite pipe
Rated pressure:	19kN
Stroke:	30mm
Oil capacity:	48ml
Tool size:	385x63.5x231mm
Weight:	1.6kg(without jaws)

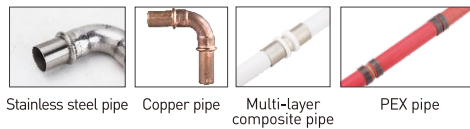

Stainless steel pipe Copper pipe Multi-layer composite pipe PEX pipe

FHT-60100

Hydraulic Press Head

For big size from 60-108mm stainless steel pipe

Technical data

Press range:	60-108mm(2-4")for stainless steel pipe and copper pipe
Rated work pressure:	700bar(70MPa)
Stroke:	80mm
Oil capacity:	80ml
Tool size:	515x280x84mm
Weight:	9.3kgs(without jaw)
Package:	Metal box

FHT-3240

Hydraulic Press Head

- Forged jaws with high strength, sturdy and durable
- Hand pump, foot pump and electrical pump optional

Technical data

Press range:	12-54mm(1/2"-2") for stainless steel pipe 12-108mm(1/2"-4") for PEX, Multi-layer composite and copper pipe
Rated press force:	32kN
Rated work pressure:	52Mpa
Stroke:	40mm
Package:	Metal box